


Note that the coin mech probably needs to be installed before the microswitch is fitted, otherwise it might not fit through the hole in the panel.

The microswitch is mounted to a bracket on the coin mech assembly using 2 machine screws, as shown here.

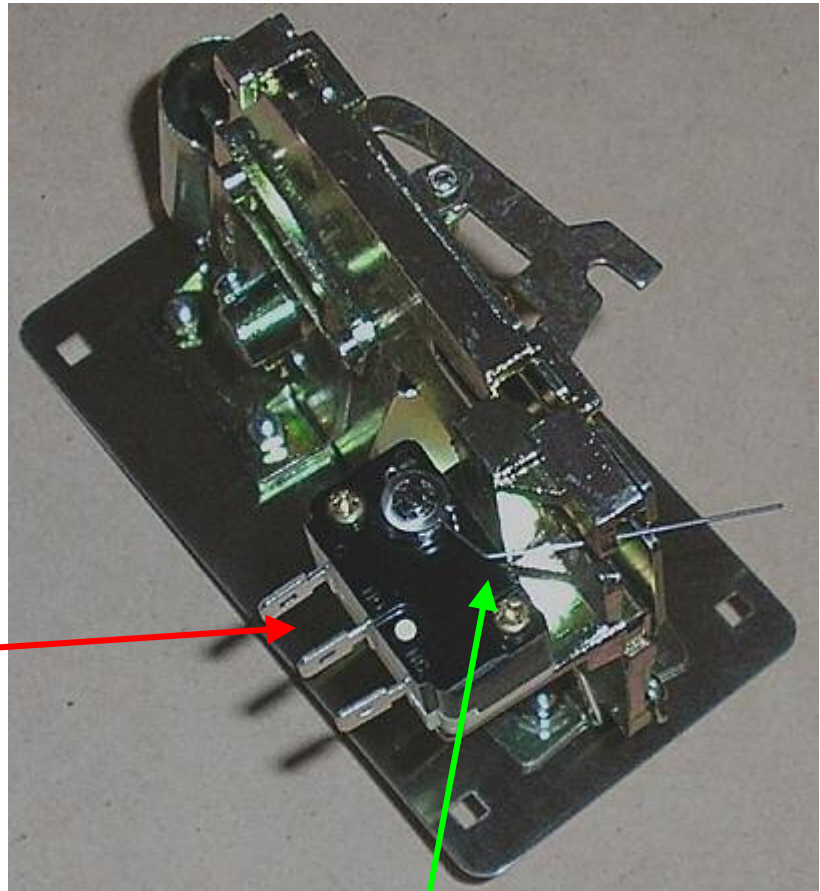

Bend the microswitch wire so it sits under the notch at the bottom of the assembly, where the coins drop out. You may want to cut the wire to shorten it a little.